

Relaxed and refined

Warm up your space with the rich appearance of heartwood, with its distinctive knots, golden color, and natural charm. Thermory Benchmark Pine boasts decades of rot resistance for low-maintenance decking and durable cladding that transform to a stunning silver, if untreated, without sacrificing strength or stability.



SPECIES:

Scots pine

APPLICATIONS:

Decking
Cladding
Porch flooring



Thermally modified



Sustainable



Weather resistant



Lightweight material



Smooth cutting



Rot resistant





Decking

Build an inviting outdoor retreat with durable, softwood decking

WIDTHS:	3.5" - 5.5"
THICKNESSES:	0.79" - 1.65"
INSTALLATION TYPES:	VISIBLE, HIDDEN



Cladding

Add character and warmth to your walls

WIDTHS:	3.5" - 5.5"
THICKNESSES:	0.79" - 1.65"
INSTALLATION TYPE:	VISIBLE, HIDDEN




Porch flooring

Unwind on the porch you've always wanted

WIDTHS:	3.5" - 5.5"
THICKNESSES:	0.79" - 1.65"
INSTALLATION TYPE:	VISIBLE, HIDDEN, SCREW

Color transformation

Wood's natural aging process is influenced by how much exposure it has to the elements. The more Benchmark Pine is exposed to UV light and rain, the faster its color will transform from brown to silver—sometimes in as little as six months. To maintain your wood's natural color outdoors, simply treat the boards with a penetrating UV protective oil.

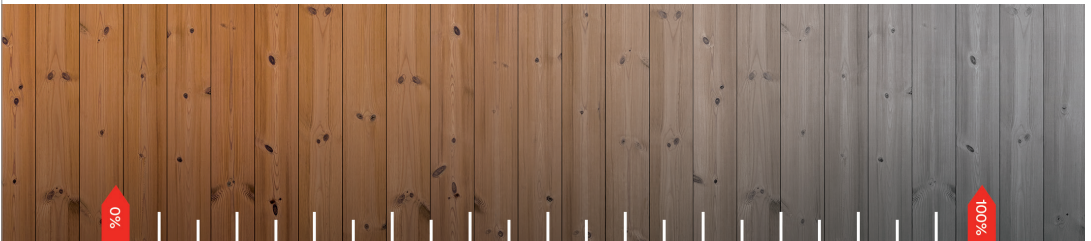

THERMORY®
LEAVE A LASTING IMPACT

Phone: 585-591-6590
Email: support@thermoryusa.com

→ [ThermoryUSA.com](https://www.thermoryusa.com)

